


Low-pressure



Two Ear Clip

W1 W4 | From Ø 5,0-7,0
To Ø 43,0-46,0

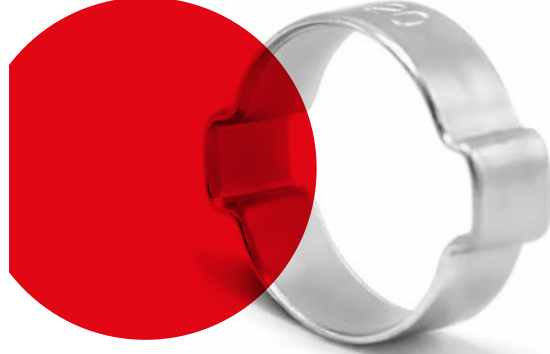

Wire clip

W1 | From Ø 7,3-7,8
To Ø 19,6-20,5



Spring clip

W1 | From Ø 6,0
To Ø 20,0



Clip clamp

W4 | From Ø 8,5-9,5
To Ø 24,5-26,0



DIN 3021
Spring-band clip

W1 | From Ø 17,0-18,5
To Ø 55,0-58,0



One ear clip
with inner ring

W1 W4 | From Ø 7,5-8,5
To Ø 17,0-19,3



OEM Ear clip

W1 | From Ø 8,3-10,0
To Ø 62,3-65,5



Wire clip with screw

W1 | From Ø 9,5-12,0
To Ø 60,0-68,0



"Normal" Mini Clip

W1 | From Ø 6,0
To Ø 29-32



Endless Band

W2 W4 | band Width (mm):
8 and 14

Medium-pressure



Worm-drive hose clip
ASFA S-PRO (12 mm)

W1 W2 W3 W4 W5 | From Ø 16-27
To Ø 220-240



Fixed diameter S-Clamp

W1 | From Ø 10,0
To Ø 46,0



Open Worm-drive clip

W2 | From Ø 6-11
To Ø 11-19



Worm-Drive hose clip
ASFA L (9 mm)

W1 W2 W3 W4 W5 | From Ø 8-12
To Ø 140-160



Worm-Drive hose clip
Black finish. ASFA L and S

W3 | From Ø 8-16
To Ø 220-240

High-pressure



Supra heavy-duty clamp

W2 W4 W5 | From Ø 17-19
To Ø 395-408



Super heavy-duty clamp

W1 | From Ø 17-19
To Ø 240-252



Supra CT Constant Tension
heavy-duty clamp

W2 W4 | From Ø 17-19
To Ø 239-252

Industry

Special diameters are available on request
Other types of rubber lining are also available

Without EPDM rubber profile



With EPDM rubber profile



Rubber-lined
P-Clip
DIN 3016

W1 W4 | From Ø 5
To Ø 40



Torque Cap for ASFA L and S
Worm-drive hose clips

W1 W2 W3 W4 W5 | From Ø 8-12
To Ø 220-240



Double bridge Worm-Drive
hose clip. ASFA L and S

W1 W2 W3 W4 W5 | From Ø 25-40
To Ø 220-240



SMS Rubber-lined
P-Clip

W1 | From Ø 4,8
To Ø 36

Automotive



Worm-drive hose clip
with inner ring. ASFA L and S

W1 W2 W3 W4 W5 | From Ø 16-27
To Ø 220-240



Worm-drive hose clip
with black inner ring. ASFA L and S

W1 W2 W3 W4 W5 | From Ø 16-27
To Ø 220-240



ASFA S-PRO TITANIUM
Worm-Drive hose clip

T1 | From Ø 16-27
To Ø 220-240



Worm drive hose clip
with antirotation feature. ASFA L and S

W3 W4 | From Ø 25-40
To Ø 140-160



ASFA CT with pre-assembly clip
ASFA L and S

W3 W4 | From Ø 16-27
To Ø 80-100

MIKALOR

At Mikalor, after 75 years' experience in designing and manufacturing different models of hose clamps, we have always firmly believed in paying attention to every small detail to ensure that we can guarantee the finest hose clamps in the world. We are aware of the requirements of many different sectors as regards our clamps, and in consequence our I&D Department work continuously to improve our products in order to offer our customers the best solutions for their applications.

We design and develop our own production technology in order to retain complete control over the manufacturing process of our hose clamps. This focus on production, combined with strict quality control, guarantee that all our customers are wholly satisfied with the quality of Mikalor products.

Since the company was founded in 1944, Mikalor has always had a clear international vocation and vision. This explains why we now export to 110 countries worldwide.

MIKALOR

www.mikalor.com



MATERIAL SPECIFICATION

W1	Screw / Bolt	Steel Qst 36-3 Cr3 White Zinc-Plating
	Band and Housing	Galvanized Steel
W2	Screw / Bolt	Steel Qst 36-3 Cr3 White Zinc-Plating
	Band and Housing	430
W3	Screw / Bolt	430
	Band and Housing	
W4	Screw / Bolt	304 Cu
	Band and Housing	304
W5	Screw / Bolt	316 Cu
	Band and Housing	316



MIKALOR